




AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SF Series High Voltage Power Supply

General Description

The SF Series high voltage power supplies are regulated high voltage power supplies. They provide outputs of up to 10kV and power levels to 15 Watts. The output of each power supply is floating with respect to the input line. This allows either polarity to be configured. The output voltage of the SF may be varied either with the unit trimpot, an external trimpot, or via an external control signal. The output ripple is typically less than 1% at full power. Each power supply may be programmed down to 30% of the maximum output voltage. All SF models offer 0.1% line regulation and 3% maximum half load to full load regulation. All SF's are reverse input voltage and short circuit protected.

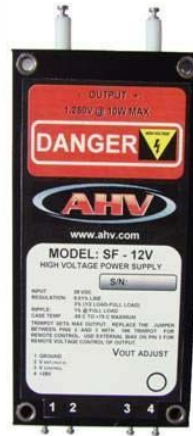


SF Series


Features

- Regulated Output
- Encapsulated
- 100 VDC to 10,000 VDC models available
- 10 Watt and 15 Watt power
- 28 VDC input
- Trimpot, Resistance or Voltage program

Connection Diagram



- Pins:**
1. Ground
 2. +5.0V Reference
 3. Vcontrol
 4. +28 VDC input



- Pins:**
5. - HV output
 6. +HV output

Available Models: (Vin = 28 VDC standard (other input voltages available 12, 15, 24, and 48V)):

10 Watt Models:

Name	Maximum Output Voltage	Maximum Output Current	1st Year
SF - 1V	100	100 mA	2003
SF - 2V	200	50 mA	1999
SF - 6 V	600	16.67 mA	1991
SF - 12 V	1,250	8 mA	1986
SF - 25V	2,500	4 mA	1983
SF- 50V	5,000	2 mA	1984
SF-100V	10,000	1 mA	1992

Available Models: Vin = 28 VDC standard (other input voltages available 12,15,24, and 48V):

15 Watt Models:

Name	Maximum Output Voltage	Maximum Output Current	1st Year
SF - 1	100	150 mA	2000
SF - 2	200	75 mA	1993
SF - 6	600	25 mA	1990
SF - 12	1,250	12 mA	1989
SF - 25	2,500	6 mA	1985
SF- 50	5,000	3 mA	1985



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SF Series

Electrical Characteristics

(at 25 degrees C unless otherwise specified)

Parameter	Conditions	Value			Units
		Min	Typical	Max	
Supply Voltage*:	(all power models)	25VDC	28VDC	31 VDC	VDC
Input Current:	No Load: (10 W models)	150	160	175	mA
	No Load: (15 W models)	160	175	185	mA
	Full Load: (10 W models)	550	600	650	mA
	Full Load: (15 W models)	850	900	950	mA
Output Ripple:	No Load (all models):	0.7%	0.7%	1%	V _{pp}
	Full Load (all models):	0.8%	0.8%	1%	V _{pp}
Load Regulation:	Half Load to Full Load		3%		V _{NL} /V _L
Output Linearity	No Load		1%		$\frac{\Delta V_{OUT}}{\Delta V_{OUT (ideal)}}$
Output Linearity	Full Load (all models):		1%		$\frac{\Delta V_{OUT}}{\Delta V_{OUT (Ideal)}}$
Short Circuit Current:	10 Watt Models:		250	350	mA
	15 Watt Models:		350	450	mA
Power Efficiency:	Full Load (10 W)		60%		P _{OUT} / P _{in}
	Full Load (15W):		60%		P _{OUT} / P _{in}
Reverse Input Polarity	Protected to 50 VDC				
Temperature Drift:	No Load			200	ppm/DegC
	Full Load			200	ppm/Deg C
Thermal Rise:	No Load (case) (15W)			25	degrees C
	Full Load (case) (15W)			45	degrees C
Slew Rate (10% - 90%)	No Load			100	mS
	Full Load			120	mS
Slew Rate (90% - 10%)	No Load			300	mS
	Full Load			200	mS
Drain Out Time	No Load (5 TC)			150	mS

* Other input voltages available: 15VDC, 24VDC, 28VDC and 48VDC



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SF Series

Physical Characteristics

(at 25 degrees C unless otherwise specified)

Parameter	Conditions	Value	Units
Dimensions	MKS	50.8 W x 101.6L x 20.6 H	mm
	English	2.0 W x 4.0 L x 0.81 H	inches
Volume:	MKS	105	cm ³
	English	6.4	inch ³
Mass:	MKS	156	grams
	English	5.6	oz
Packaging:	Black anodized aluminum case with RTV elastomer encapsulation		
Finish	Smooth arushed aluminum		
Terminations:	Input and control: Teflon terminals (4) HV Output: Teflon terminals (2)		

Environmental Characteristics



(at 25 degrees C unless otherwise specified)

Parameter	Conditions	Value	Units
Temperature Range	case temperature	-40 degrees to + 71 degrees	Celsius
	case temperature	-40 degrees to + 160 degrees	Fahrenheit
Shock:	MIL-STD-810 Method 516	40 g's	Proc IV
Altitude:	pins sealed against corona	-350 to + 16,700	meters
	pins sealed against corona	-1,000 to +55,000	feet
Vibrations:	MIL-STD-810 Method 514	20 g's	Curve E
Thermal Shock	MIL-STD-810 Method 504	-40 deg C to + 71 deg C	Class 2



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SF Series Performance Charts

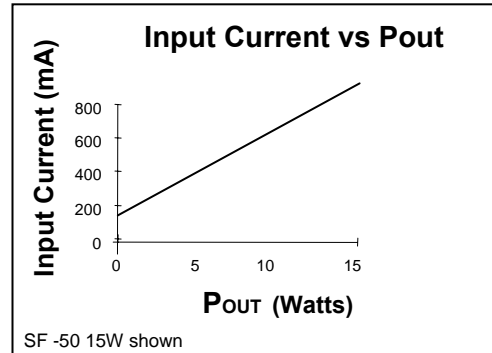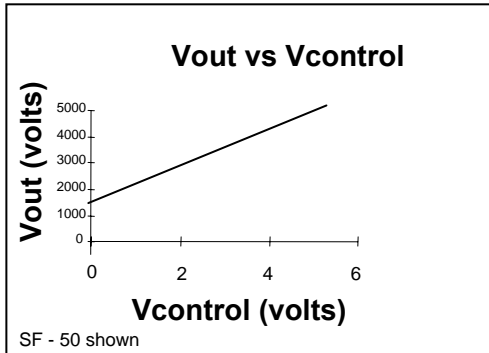

SF Series Application Notes

The SF Series high voltage power supplies are powered by an input voltage of 28 VDC. They can be adjusted to provide a set output voltage or they can be controlled either by an external resistance or an external voltage. By connecting the Vcontrol pin to the +5.0 volt reference pin the maximum output voltage of the power supply is obtained and is adjustable via the trimpot located on the top of the power supply. Reductions in output voltage to 30% of maximum are possible by this method. This is shown in Figure 1 below. The maximum voltage is fixed by the model and is a regulated output. In this configuration, the output voltage will not vary with input line fluctuations or output load changes up to the maximum power rating for the power supply. For standard 28 VDC input models, the input line may vary from 25 VDC to 31 VDC and the output voltage will remain regulated within 0.01%. Standard output loads may be as high as 15 Watts of power (for 15 Watt models). The input AC bypass capacitor C1 is optional and is utilized to prevent switching spikes from riding back on the input power lines. Values of 0.1 uF to 10 uF are commonly used.

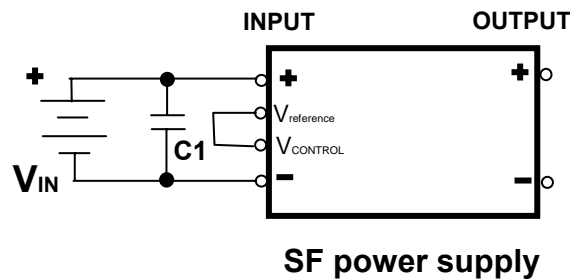


Figure 1: Basic SF hookup schematic for maximum output

The output voltage of the SF unit may be programmed from an external voltage. It may be reduced in magnitude by placing a voltage lower than the +5.0 volt reference voltage onto the Vcontrol pin (Pin 3). By placing a voltage of +2.5 VDC onto the control voltage pin the output will be reduced in half. Figure 2 details a simple method of using an external voltage source to vary the output voltage of the SF power supply. Typical values of input impedance for the SF are 5K Ohms. This makes programming via a DAC or operational amplifier an easy chore for the SF power supply. The control voltage is referenced to the input ground. There is no connection between the input ground and output HV return in all SF power supplies.



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SF Series Application Notes (continued)

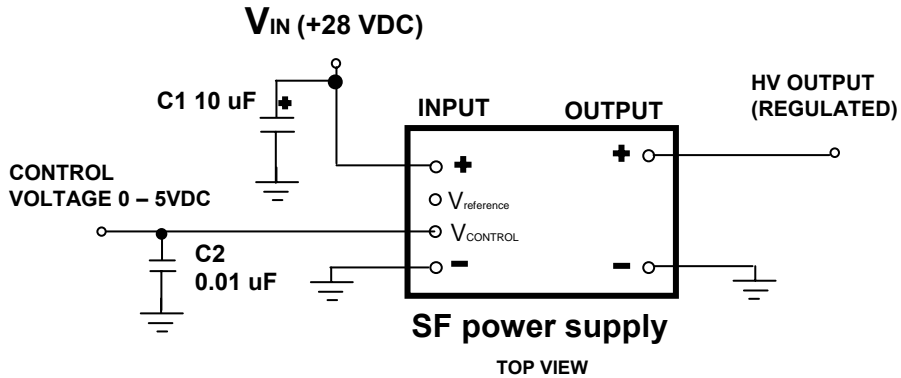


Figure 2: Voltage programming

Capacitor C1 removes switching spikes from the input line and C2 is an AC bypass to insure smooth voltage control levels.

The SF power supply may also be programmed by using a simple trimpot and the internal +5.0 volt reference. Figure 3 shows this topology. Because the input impedance of the control voltage pin is 5K Ohms, the output of the SF may be controlled between minimum and maximum values using the formulas given. The output in both configurations can always be lowered or adjusted via the internal trimpot located on the top surface of the power supply.

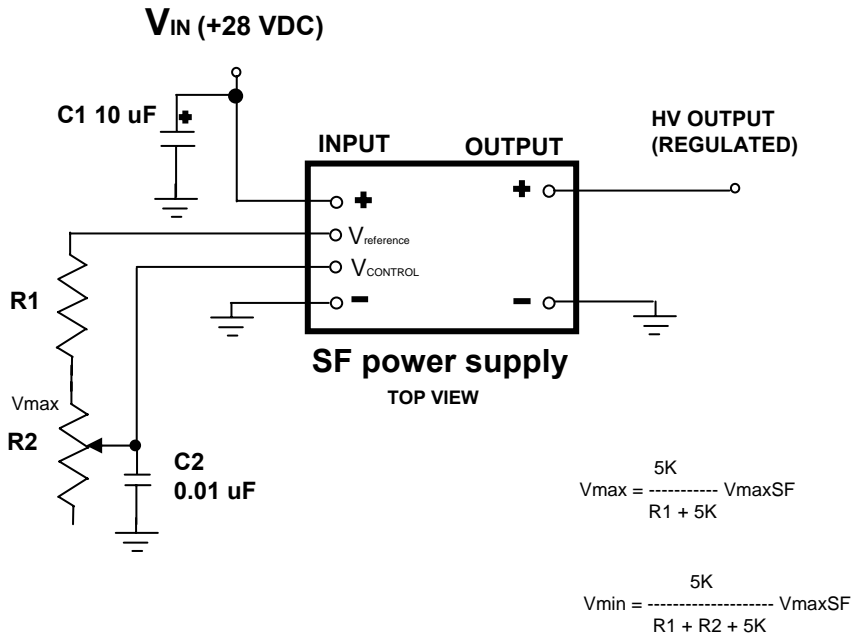


Figure 3: Resistance Programming




AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SF Series

Note: R2 is internal trimpot accessible via top of power supply

Equivalent SF Circuit Model

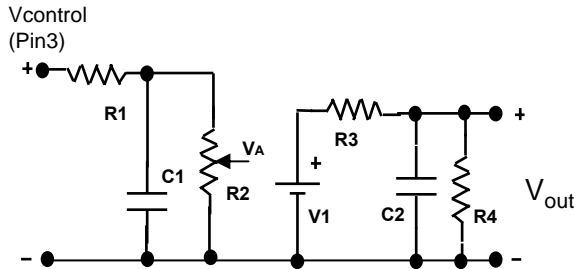


Equivalent SF HVPS Circuit Model

- R1 = 100 Ohms
- R2 = 5K Ohms (trimpot)
- R3 = $(15 \times V_{out\ max})$ Ohms
- R4 = $(4 \times V_{out\ max}^2)$ Ohms
- C1 = (0.1×10^{-6}) Farads
- C2 = $(0.0075 \times I_{out\ max} / V_{out\ max})$ Farads
- V1 = $(V_A \times V_{out\ max} / 5.0)$ Volts

For example, for an SF – 50 10W:

- Voutmax = 5000 V
- Poutmax = 10 W
- Ioutmax = 0.002 A
- R1 = 100 Ohms
- R2 = 5K Ohms
- R3 = 75K Ohms
- R4 = 100 Megohm
- C1 = 0.1 uF
- C2 = 0.003 uF

Outline Drawing: (inches (millimeters))

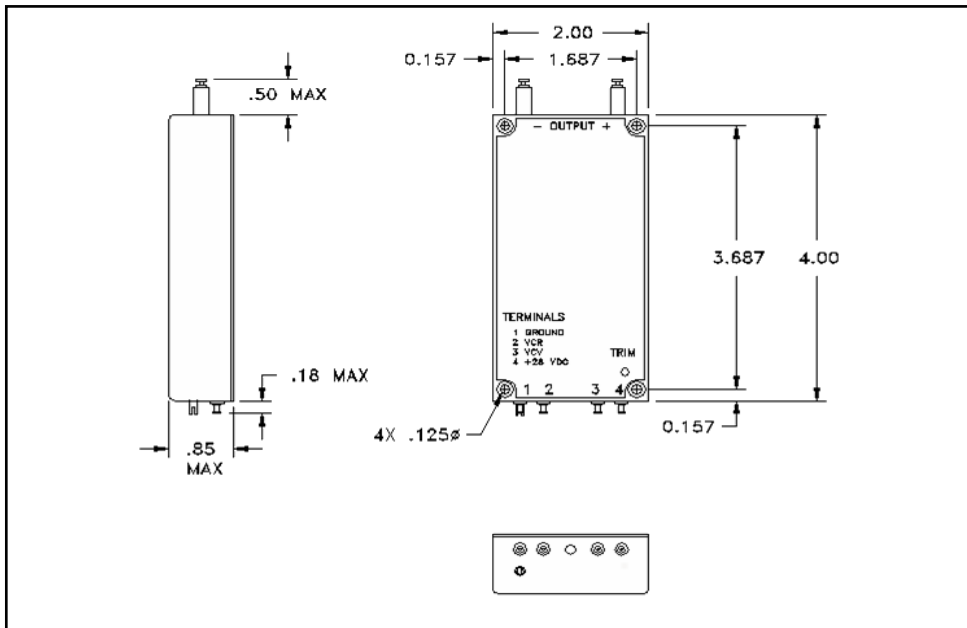

Ordering Information:

SF – XXV* / Z

XX = Output voltage
Z = Input voltage (blank if 28VDC)
* = Remove V for 15 Watt units

Example:

- SF – 50V : Maximum output = 5,000 V 10 Watts 28 VDC input
- SF – 50 : Maximum output = 5,000 V 15 Watts 28 VDC input