




**AMERICAN HIGH VOLTAGE**  
POWER SUPPLIES FOR THE WORLD

# J Series High Voltage Power Supply

## General Description

The J Series high voltage power supplies are regulated high voltage power supplies. They provide outputs of up to 10kV and power levels to 3 Watts. The output of each power supply is floating with respect to the input line. This allows either polarity to be configured. The output voltage of the J may be varied either with the unit trimpot, an external trimpot, or via an external control signal. The output ripple is typically less than 1% at full power. Each power supply may be programmed down to 0% of the maximum output voltage. All J models offer 0.01% line regulation and 3% maximum half load to full load regulation. All J's are reverse input voltage and short circuit protected.

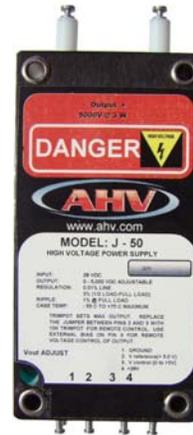


## Features

- Regulated Output
- Encapsulated
- 100 VDC to 10,000 VDC models available
- 3 Watt power
- 15 VDC input or 24 VDC input models
- Trimpot, Resistance or Voltage program


**J Series**

## Connection Diagram



Pins:

1. Ground
2. +5.0V Reference
3. Vcontrol
4. +24 VDC input



Pins:

5. + HV output
6. - HV output

## Available Models:

### 15 Volt input Models:

Name	Maximum Output Voltage	Maximum Output Current	1 <sup>st</sup> Year
J - 1/15	100	30 mA	2001
J - 2/15	200	15 mA	1992
J - 6/15	600	5 mA	1995
J - 12/15	1,250	2.4 mA	1997
J - 25/15	2,500	1.2 mA	1994
J - 50/15	5,000	0.6 mA	1990
J - 100/15	10,000	0.3 mA	1992

**Available Models:****24 Volt Input Models:**

<b>Name</b>	<b>Maximum Output Voltage</b>	<b>Maximum Output Current</b>	<b>1<sup>st</sup> Year</b>
J - 1/24	100	30 mA	2003
J - 2/24	200	15 mA	1999
J - 6/24	600	5 mA	1991
J - 12/24	1,250	2.4 mA	1986
J - 25/24	2,500	1.2 mA	1983
J - 50/24	5,000	0.6 mA	1984
J - 100/24	10,000	0.3 mA	1992



**AMERICAN HIGH VOLTAGE**  
POWER SUPPLIES FOR THE WORLD

**J Series**

## Electrical Characteristics

(at 25 degrees C unless otherwise specified)

Parameter	Conditions	Value			Units
		Min	Typical	Max	
Supply Voltage*:	15 Vin models	13	15	17	VDC
	24 Vin models	22	24	26	VDC
Input Current:	No Load	90	100	10	mA
	Full Load	180	200	220	mA
Output Ripple:	No Load (all models):	0.7%	0.7%	1%	Vpp
	Full Load (all models):	0.8%	0.8%	1%	Vpp
Load Regulation:	No Load to Full Load Half Load to Full Load			20% 3%	VNL/VL VNL/VL
Output Linearity	No Load		1%		$\frac{\Delta V_{OUT}}{\Delta V_{OUT} (ideal)}$
Output Linearity	Full Load (all models):		1%		$\frac{\Delta V_{OUT}}{\Delta V_{OUT} (ideal)}$
Short Circuit Current:			250		mA
Power Efficiency:			60%		$P_{OUT} / P_{IN}$
Reverse Input Polarity	Protected to 50 VDC				
Temperature Drift:	No Load			200	ppm/DegC
	Full Load			200	ppm/Deg C
Thermal Rise:	No Load (case)			15	degrees C
	Full Load (case)			25	degrees C
Slew Rate (10% - 90%)	No Load			100	mS
	Full Load			120	mS
Slew Rate (90% - 10%)	No Load			300	mS
	Full Load			200	mS
Drain Out Time	No Load (5 TC)			150	mS



**AMERICAN HIGH VOLTAGE**  
POWER SUPPLIES FOR THE WORLD

**J Series**

## Physical Characteristics

(at 25 degrees C unless otherwise specified)



Parameter	Conditions	Value	Units
Dimensions	MKS	38.1 W x 76.2L x 20.6 H	mm
	English	1.5 W x 3.0 L x 0.81 H	inches
Volume:	MKS	60	cm <sup>3</sup>
	English	3.65	inch <sup>3</sup>
Mass:	MKS	120	grams
	English	4.3	oz
Packaging:	Black anodized aluminum case with RTV elastomer encapsulation		
Finish	Smooth brushed aluminum		
Terminations:	Input and control: Teflon terminals (4) HV Output: Teflon terminals (2) (AMP LGH-1/2 on Models >5kV)		

## Environmental Characteristics

(at 25 degrees C unless otherwise specified)

Parameter	Conditions	Value	Units
Temperature Range	case temperature	-40 degrees to + 71 degrees	Celsius
	case temperature	-40 degrees to + 160 degrees	Fahrenheit
Shock:	MIL-STD-810 Method 516	40 g's	Proc IV
Altitude:	pins sealed against corona	-350 to + 16,700	meters
	pins sealed against corona	-1,000 to +55,000	feet
Vibrations:	MIL-STD-810 Method 514	20 g's	Curve E
Thermal Shock	MIL-STD-810 Method 504	-40 deg C to + 71 deg C	Class 2

## J Series Performance Charts

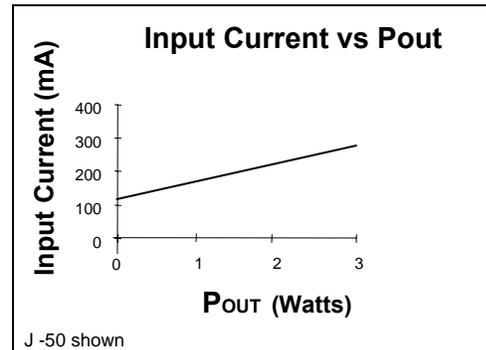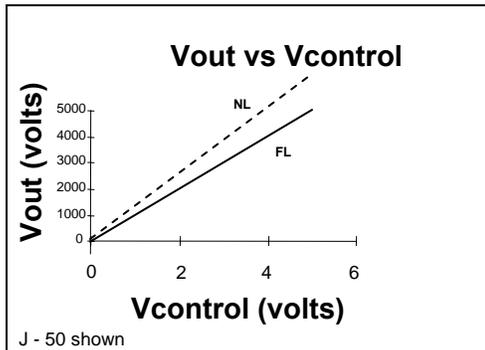

## J Series Application Notes

The JSeries high voltage power supplies are powered by an input voltage of 24 VDC. They can be adjusted to provide a set output voltage or they can be controlled either by an external resistance or an external voltage. By connecting the Vcontrol pin to the +5.0 volt reference pin the maximum output voltage of the power supply is obtained and is adjustable via the trimpot located on the top of the power supply. Reductions in output voltage to 0% of maximum are possible by this method. This is shown in Figure 1 below. The maximum voltage is fixed by the model and is a regulated output. In this configuration, the output voltage will not vary with input line fluctuations or output load changes up to the maximum power rating for the power supply. For standard 24 VDC input models, the input line may vary from 21 VDC to 27 VDC and the output voltage will remain regulated within 0.01%. Standard output loads may be as high as 3 Watts of power. The input AC bypass capacitor C1 is optional and is utilized to prevent switching spikes from riding back on the input power lines. Values of 0.1 uF to 10 uF are commonly used.

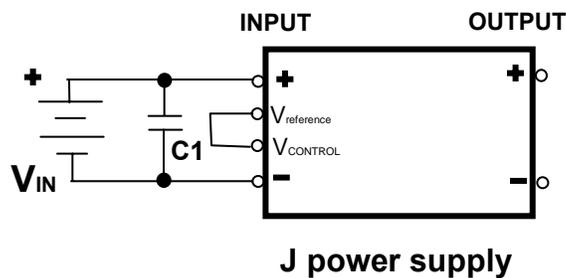


Figure 1: Basic J hookup schematic for maximum output

The output voltage of the J unit may be programmed from an external voltage. It may be reduced in magnitude by placing a voltage lower than the +5.0 volt reference voltage onto the Vcontrol pin (Pin 3). By placing a voltage of +2.5 VDC onto the control voltage pin the output will be reduced in half. Figure 2 details a simple method of using an external voltage source to vary the output voltage of the J power supply. Typical values of input impedance for the J are 5K Ohms. This makes programming via a DAC or operational amplifier an easy chore for the J power supply. The control voltage is referenced to the input ground. There is no connection between the input ground and output HV return in all J power supplies.



**AMERICAN HIGH VOLTAGE**  
POWER SUPPLIES FOR THE WORLD

## J Series Application Notes (continued)

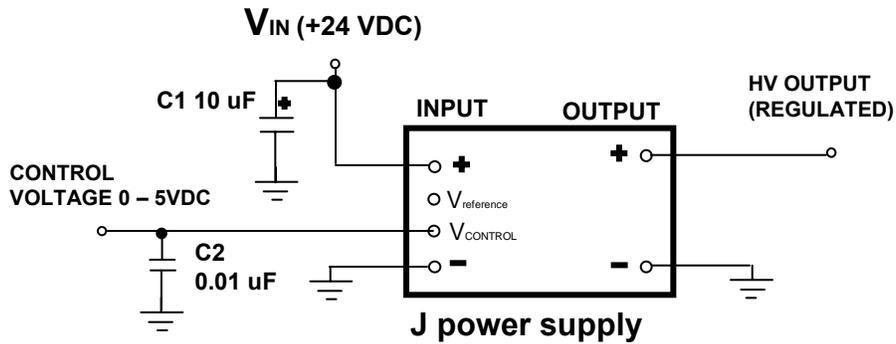


Figure 2: Voltage programming

Capacitor C1 removes switching spikes from the input line and C2 is an AC bypass to insure smooth voltage control levels.

The J power supply may also be programmed by using a simple trimpot and the internal +5.0 volt reference. Figure 3 shows this topology. Because the input impedance of the control voltage pin is 5K Ohms, the output of the J may be controlled between minimum and maximum values using the formulas given. The output in both configurations can always be lowered or adjusted via the internal trimpot located on the top surface of the power supply.


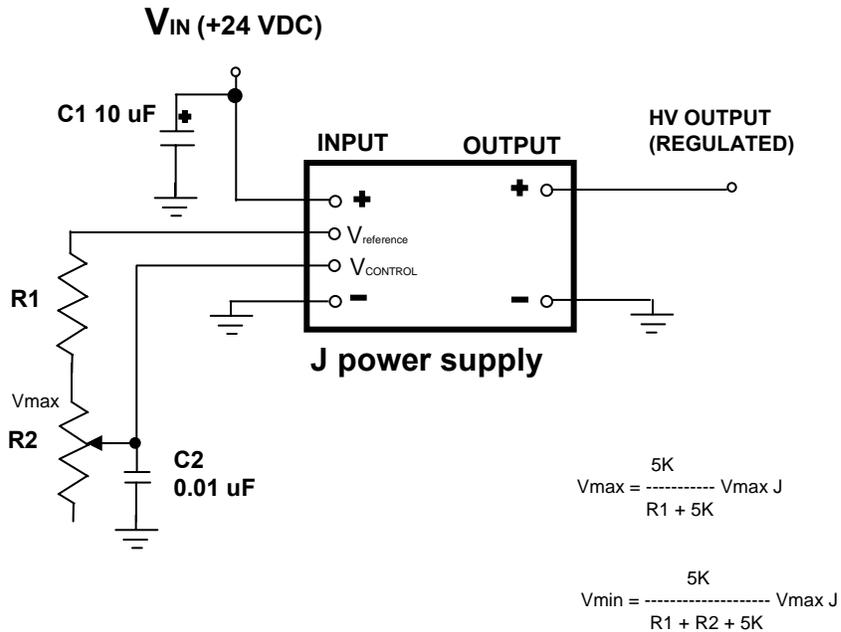


Figure 3: Resistance Programming

Note: R2 is internal trimpot accessible via top of power supply

## Equivalent J Circuit Model

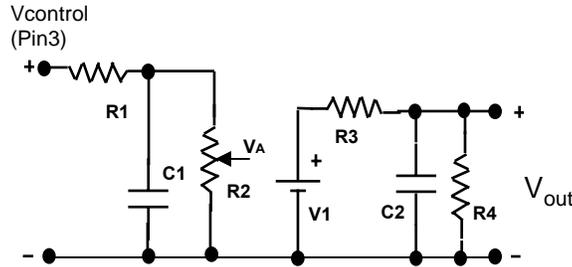


Equivalent J HVPS Circuit Model

R1 = 100 Ohms  
 R2 = 5K Ohms (trimpot)  
 R3 =  $(5 \times V_{out\ max})$  Ohms  
 R4 =  $(10 \times V_{out\ max}^2)$  Ohms  
 C1 =  $(0.01 \times 10^{-6})$  Farads  
 C2 =  $(0.008 \times I_{out\ max} / V_{out\ max})$  Farads  
 V1 =  $(V_A \times V_{out\ max} / 5.0)$  Volts

For example, for an J - 50/15 :

Vout<sub>max</sub> = 5,000 V  
 Pout<sub>max</sub> = 3 W  
 Iout<sub>max</sub> = 0.0006 A  
 R1 = 100 Ohms  
 R2 = 5K Ohms  
 R3 = 25K Ohms  
 R4 = 250 Megohm  
 C1 = 0.01 uF  
 C2 = 960 pF

## Outline Drawing: (inches)

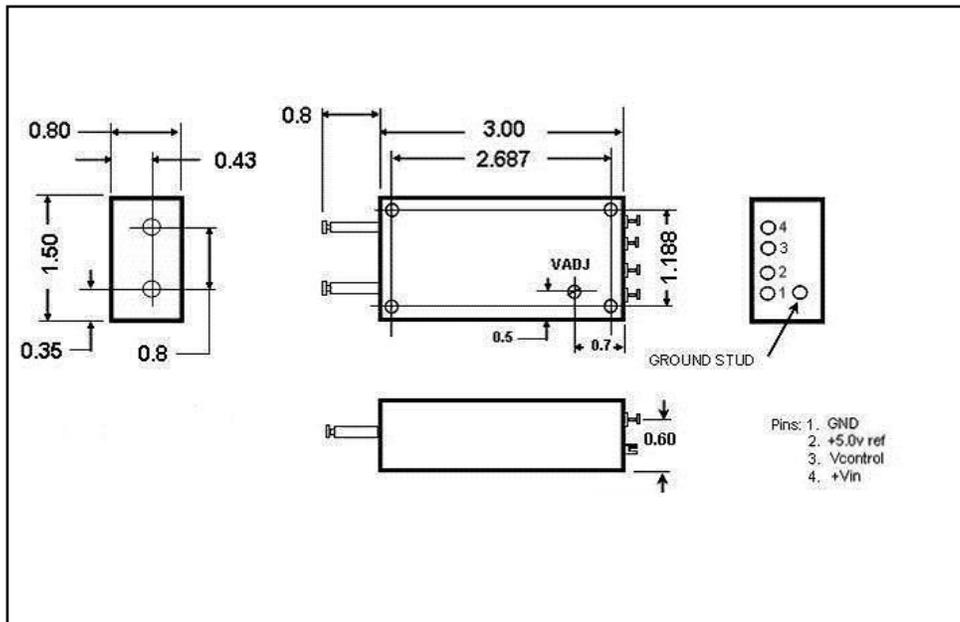

### Ordering Information:

**J - XX / Y**

XX = Output voltage  
 Y = Input voltage (15 or 24 VDC)

#### Example:

J - 6/15 Maximum output = 600 V 3 Watts 15 VDC input