



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

HTR/HTDR Series

HTR / HTDR Series

200° C High Voltage Power Supply

General Description


The HTR/HTDR Series high voltage power supplies are designed to operate at extreme temperatures and in harsh environments especially for the oil well logging industry. The HTR/HTDR units provide up to 3kV at 100 uA of regulated output, with either positive or negative polarity. All models are adjustable over a 3:1 output voltage range by either voltage or resistance programming. Temperature drift is less than 100 ppm/deg C by using advanced internal reference and drift compensation techniques. All models are reverse input and output arc and short circuit protected.

Features

- Regulated
- Encapsulated and Shielded
- Voltage and Resistance programmable
- 1kV, 2kV and 3kV available
- Various input voltages available
- Positive or Negative Polarity
- **Low Temperature Drift (+/-10VDC) Option available**




Connection Diagram/ Outline Drawing

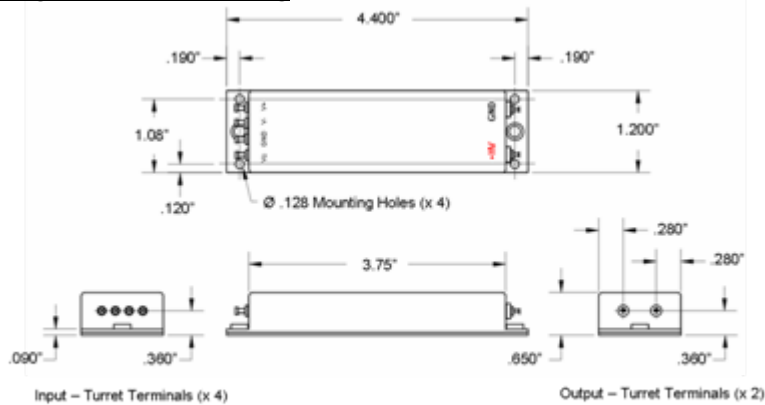

*All Dimensions in Inches
*Tolerances ±.005"

Single-Rectangular Configuration (HTR)

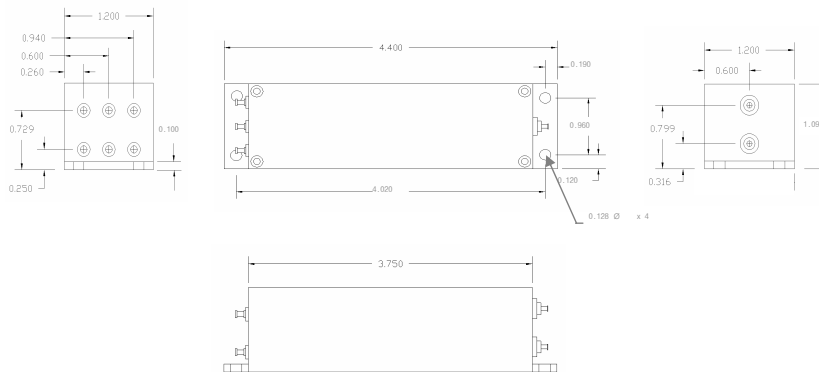

All dimension in inches +/-0.01

Dual-Rectangular Configuration (HTDR)



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

Electrical Characteristics

(at 25 degrees C unless otherwise specified)

HTR/HTDR Series

| Parameter | Conditions | Value | | | Units |
|---|-------------------------|---------|---------|--------|---|
| | | Min | Typical | Max | |
| Supply Voltage*: | HTR/HTDR – 15 | 14 VDC | 15VDC | 16 VDC | VDC |
| | HTR/HTDR - 24 | 22 VDC | 24VDC | 26 VDC | VDC |
| | HTR/HTDR - 30 | 27 VDC | 30VDC | 33 VDC | VDC |
| Input Current: | No Load (-15 model): | 45 | 50 | 65 | mA |
| | No Load (-24 model): | 30 | 35 | 40 | mA |
| | No Load (-30 model): | 30 | 35 | 40 | mA |
| | Full Load (-15 model): | 75 | 80 | 85 | mA |
| | Full Load (-24 model): | 36 | 40 | 44 | mA |
| | Full Load (-30 model): | 36 | 40 | 44 | mA |
| Output Ripple: | No Load (all models): | 0.015 % | 0.02 % | 0.03 % | Vpp |
| | Full Load (all models): | 0.02 % | 0.03 % | 0.04% | Vpp |
| Load Regulation: | No Load to Full Load | 0.1 % | 0.2 % | 0.25 % | V_{NL}/V_L |
| | Half Load to Full Load | 0.1 % | 0.1 % | 0.2 % | V_{NL}/V_L |
| Output Linearity | No Load | | 1% | | $\frac{\Delta V_{OUT}}{\Delta V_{OUT} (ideal)}$ |
| Output Linearity | Full Load (all models): | | 1% | | $\frac{\Delta V_{OUT}}{\Delta V_{OUT} (ideal)}$ |
| Short Circuit Current: | (maximum input current) | | 100 | 125 | mA |
| Power Efficiency: | Full Load | 20% | 25% | 30% | $\frac{P_{OUT}}{P_{IN}}$ |
| Reverse Input Polarity | Protected to 50 VDC | | | | |
| Temperature Drift: (Low Temp Drift Option Available) | No Load | | 50 | 100 | ppm/DegC |
| | Full Load | | 50 | 100 | ppm/Deg C |
| Thermal Rise: | No Load (case) | | | 2 | degrees C |
| | Full Load (case) | | | 5 | degrees C |
| Slew Rate (10% - 90%) | No Load | | | 100 | mS |
| | Full Load | | | 120 | mS |
| Slew Rate (90% - 10%) | No Load | | | 200 | mS |
| | Full Load | | | 100 | mS |
| Drain Out Time | No Load (5 TC) | | | 150 | mS |



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

Physical Characteristics

(at 25 degrees C unless otherwise specified)

Rectangular Shape (HTR)

| Parameter | Conditions | Value | Units |
|---------------|---|--------------------------|-------------------|
| Dimensions | MKS | 111.8 L x 30.5W x 16.5 H | mm |
| | English | 4.4 L x 1.20 W x 0.65 H | inches |
| Volume: | MKS | 48 | cm ³ |
| | English | 2.9 | inch ³ |
| Weight: | MKS | 120 | grams |
| | English | 4.3 | oz |
| Packaging: | Black anodized Aluminum epoxy encapsulation | | |
| Terminations: | Input: | Teflon Terminals | |
| | Output: | Teflon Terminals | |

Dual-Rectangular Shape (HTDR)

| Parameter | Conditions | Value | Units |
|---------------|---|----------------------------|-------------------|
| Dimensions | MKS | 111.8 L x 30.5 W x 27.69 H | mm |
| | English | 4.4 L x 1.20 W x 1.09 H | inches |
| Volume: | MKS | 95 | cm ³ |
| | English | 5.78 | inch ³ |
| Weight: | MKS | 155 | grams |
| | English | 5.47 | oz |
| Packaging: | Black anodized Aluminum epoxy encapsulation | | |
| Terminations: | Input: | Teflon Terminals | |
| | Output: | Teflon Terminals | |

HTR/HTDR Series



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

Environmental Characteristics

(at 25 degrees C unless otherwise specified)



| Parameter | Conditions | Value | Units |
|-------------------|-------------------------|------------------------------|------------|
| Temperature Range | case temperature | -40 degrees to + 200 degrees | Celsius |
| | case temperature | -40 degrees to + 392 degrees | Fahrenheit |
| Shock: | ½ Sine, 5 msec Duration | 225 g's | |
| Vibrations: | 250 Hz Random | 25 g's | Curve E |
| Pressure | | 0 to 500PSIG | |

HTR/HTDR Series



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

HTR/HTDR Series Performance Charts

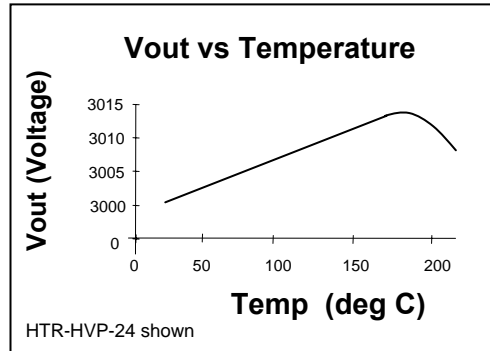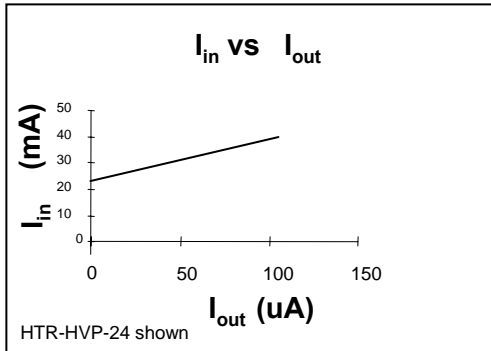

HTR/HTDR Series Application Notes

HTR/HTDR Series high voltage power supplies are regulated against both line and load changes. Input current as a function of load is shown above, as is output voltage as a function temperature. Setting the output voltage to a fixed value which is lower than the unit's maximum output can be accomplished by either of two methods. In the resistance programming mode, a resistor is inserted between the Control Pin and the Ground Pin. For positive output units, a resistance value of zero Ohms yields the maximum output voltage. Figure 1 shows the connections for a positive output power supply. Figure 2 shows the output voltage as a function of control resistor.

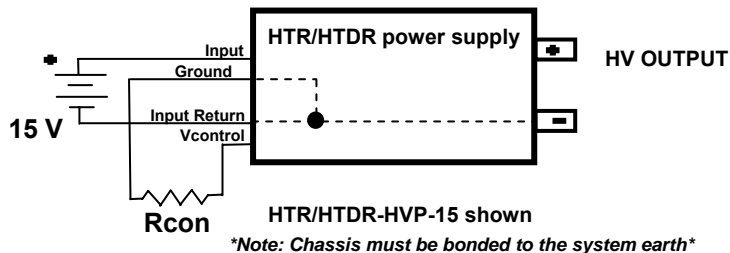


Figure 1: Resistance program of positive output of HTR/HTDR



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

HTR/HTDR Series Application Notes (continued)

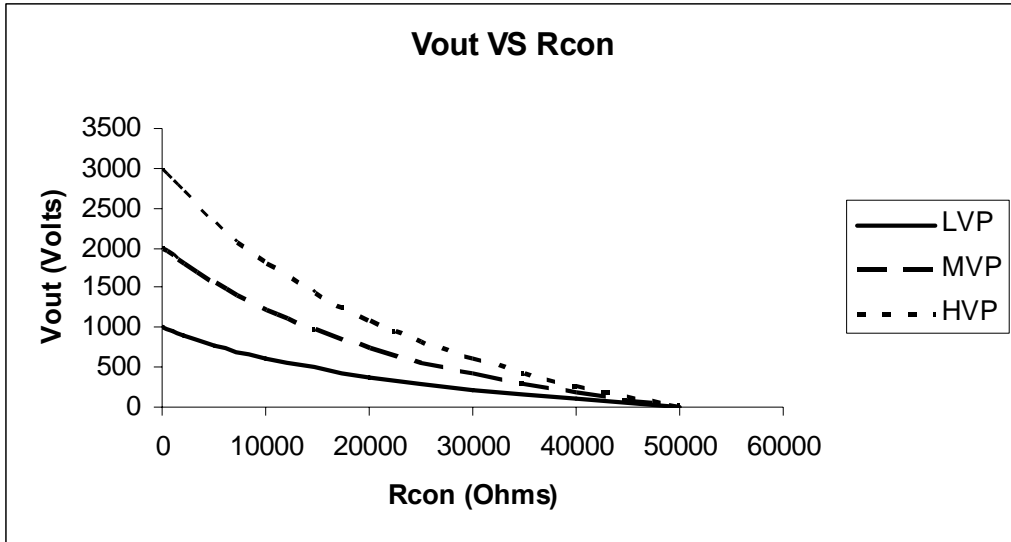


Figure 2: Positive Style HTR/HTDR Output Voltage as a function of control resistor

Some models of the HTR/HTDR Series high voltage power supplies can provide a negative output voltage. To set the output voltage to a fixed value lower than the maximum that the unit can provide is easily accomplished. In the resistance programming mode, a resistor is inserted between the Control Pin and the Ground Pin. For negative output units, an open circuit yields the maximum output voltage. Figure 3 shows the connections for a negative output power supply. Figure 4 shows the output voltage as a function of control resistor.

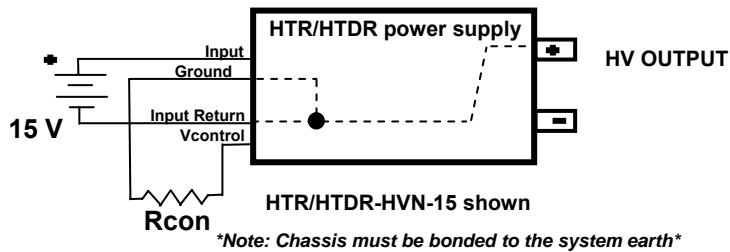


Figure 3: Resistance program of negative output of HTR/HTDR



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

HTR/HTDR Series Application Notes (continued)

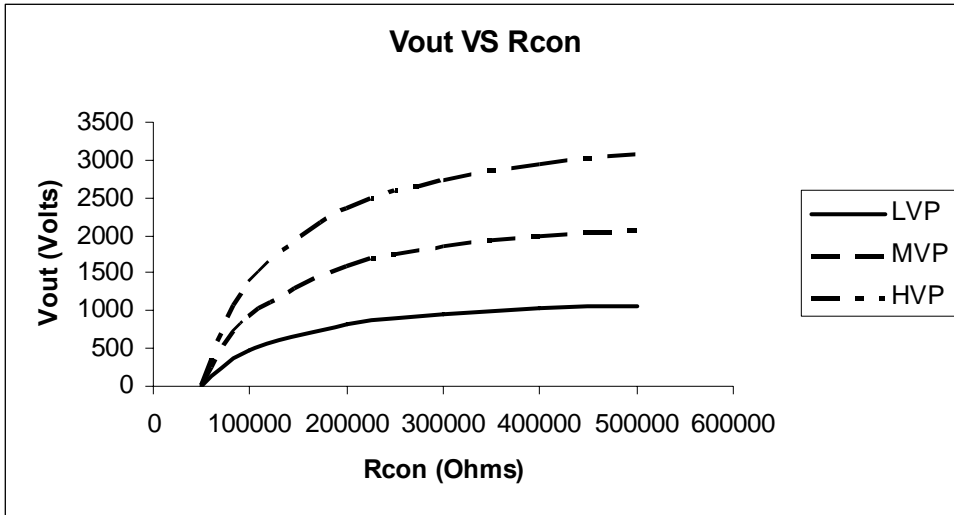


Figure 4: Negative Style HTR/HTDR Output Voltage as a function of control resistor

All HTR/HTDR power supplies can be controlled by an external reference voltage placed into the Control Pin. Figure 5 details this connection for positive style output units while Figure 6 shows the effect of this external voltage on the output voltage of the unit. The power supply will regulate at the set voltage and be stable against line and load variations as long as the external control voltage is fixed in magnitude.

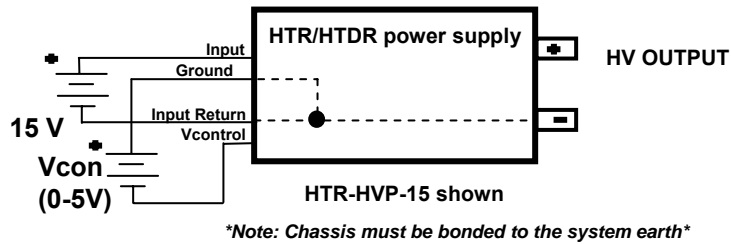


Figure 5: Voltage program of positive output of HTR/HTDR



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

HTR/HTDR Series Application Notes (continued)

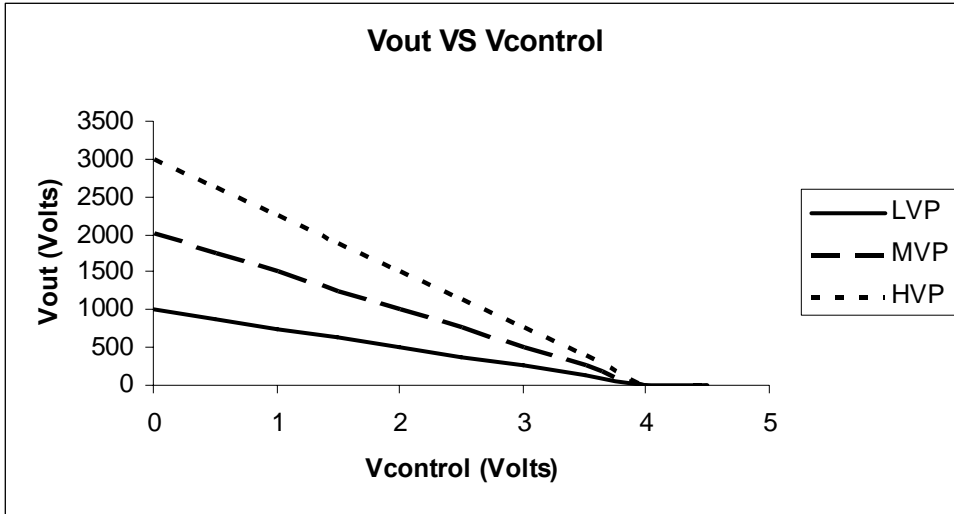


Figure 6: Positive Style HTR/HTDR Output Voltage as a function of program voltage
Different Voltage programming mode is available

Negative output HTR/HTDR power supplies can also be controlled by an external reference voltage placed into the Control Pin. Figure 7 details this connection for negative style output units while Figure 8 shows the effect of this external voltage on the output voltage of the unit. The power supply will regulate at the set voltage and be stable against line and load variations as long as the external control voltage is fixed in magnitude.

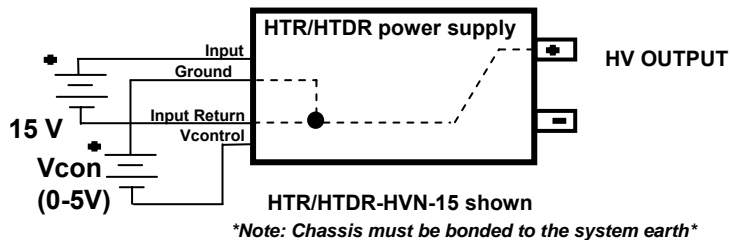


Figure 7: Voltage program of negative output of HTR/HTDR



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

HTR/HTDR Series Application Notes (continued)


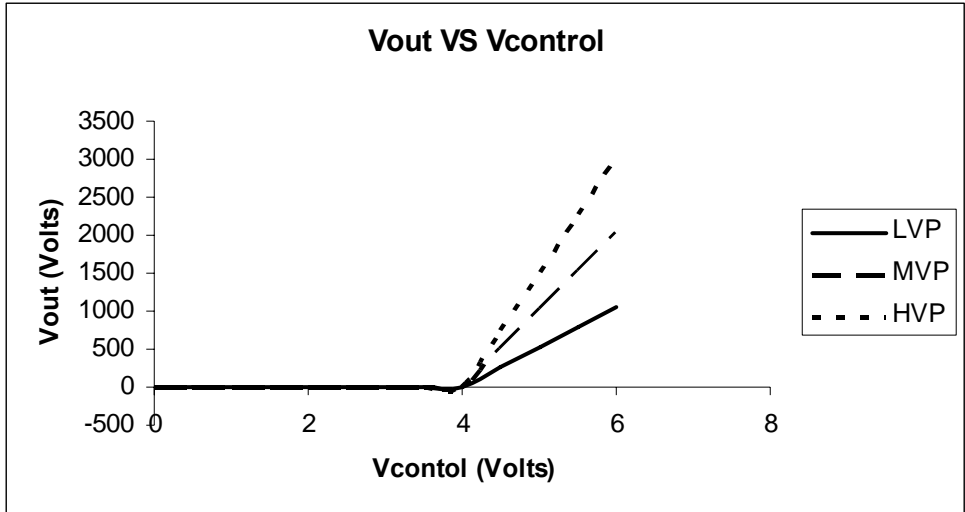


Figure 8: Negative Style HTR/HTDR Output Voltage as a function of program voltage
Different Voltage programming mode is available

Equivalent HTR Circuit Model

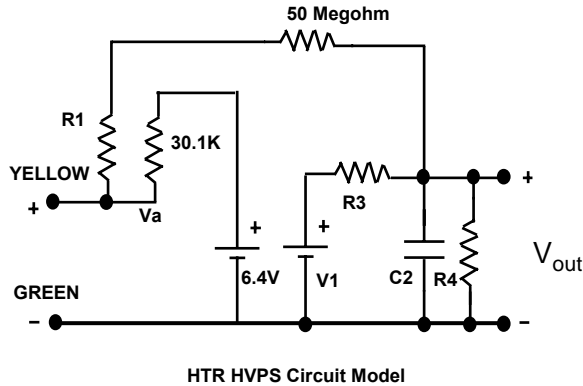

- R1 = 201K Ohm (LVP), 100K Ohm (MVP), 67K Ohm (HVP)
90K Ohm (LVN), 30K Ohm (MVN), 10K Ohm (HVN)
- R3 = 1 K Ohms
- R4 = 100 Megohms
- C2 = (3 x 10⁻⁹) Farads

V1 = Positive output units: $4.01 + (2 E8) / R1 - (50 E6)(Va)/R1$
 = Negative output units: $(50 E6)(Va)/R1 - (2 E8)/R1 + 4.01$



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

Ordering Information:

Single-rectangular Shape:

HTR-XVY – Z – LD

X = Output voltage range: L = 1KV, M = 2KV, MH = 2.5KV, H = 3KV
Y = polarity P = positive, N = negative
Z = Input voltage 15, 24, 30
LD = Low Temperature Drift (+/-10VDC from 25°C to 200°C)

Example:

| | |
|-----------------|--|
| HTR-LVP-24: | Maximum output = 1,000VDC positive polarity, 24VDC input |
| HTR-LVP-24-LD: | Maximum output = 1,000VDC positive polarity, 24VDC input, Low Temp Drift |
| HTR-MVP-15: | Maximum output = 2,000VDC positive polarity, 15VDC input |
| HTR-MVP-15-LD: | Maximum output = 2,000VDC positive polarity, 15VDC input, Low Temp Drift |
| HTR-MHVP-15: | Maximum output = 2,500VDC positive polarity, 15VDC input |
| HTR-MHVP-15-LD: | Maximum output = 2,500VDC positive polarity, 15VDC input, Low Temp Drift |
| HTR-HVN-30: | Maximum output = 3,000VDC negative polarity, 30VDC input |
| HTR-HVN-30-LD: | Maximum output = 3,000VDC negative polarity, 30VDC input, Low Temp Drift |

Dual-rectangular Shape:

HTDR-XVY – Z – LD

X = Output voltage range: L = 1KV, M = 2KV, MH = 2.5KV, H = 3KV
Y = polarity P = positive, N = negative
Z = Input voltage 15, 24, 30
LD = Low Temperature Drift (+/-10VDC from 25°C to 200°C)

*2 independent output supplies

Example:

| | |
|------------------|--|
| HTDR-LVP-24: | Maximum output = 1,000VDC positive polarity, 24VDC input |
| HTDR-LVP-24-LD: | Maximum output = 1,000VDC positive polarity, 24VDC input, Low Temp Drift |
| HTDR-MVP-15: | Maximum output = 2,000VDC positive polarity, 15VDC input |
| HTDR-MVP-15-LD: | Maximum output = 2,000VDC positive polarity, 15VDC input, Low Temp Drift |
| HTDR-MHVP-15: | Maximum output = 2,500VDC positive polarity, 15VDC input |
| HTDR-MHVP-15-LD: | Maximum output = 2,500VDC positive polarity, 15VDC input, Low Temp Drift |
| HTDR-HVN-30: | Maximum output = 3,000VDC negative polarity, 30VDC input |
| HTDR-HVN-30-LD: | Maximum output = 3,000VDC negative polarity, 30VDC input, Low Temp Drift |

**Only Solder AHV's High Temperature products with HMP Solder.*

*** Different Voltage Programming mode is available, please contact factory – Phone: 775-777-0992
Email: ahv@ahv.com*