



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SCR Series High Voltage Power Supply

SCR Series

General Description


The SCR Series high voltage power supplies are regulated high voltage power supplies. They provide outputs of up to 5kV and are rated at 5 Watts of power. The output voltage of the SCR may be varied either with an external trimpot or via an external control signal. The output ripple is typically less than 1% at full power. The return output lead is internally connected to the input power return. Both positive and negative output SCR power supplies are available. Each power supply may be programmed down to zero volts output and offer 0.1% line and load regulation. All SCR's are reverse input voltage and short circuit protected.

Features

- Regulated Output
- Encapsulated
- 50 VDC to 5,000 VDC available
- 5 Watt power
- 12 VDC input
- Resistance or Voltage Programming



Connection Diagram

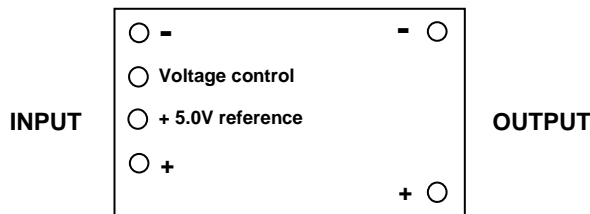

Bottom View

Available Models: (Vin = 12VDC standard (other input voltages available)):

5 Watt Models:

Name	Maximum Output Voltage	Maximum Output Current	1 st Year
SCR - 0.5	50 (Vin = 12 VDC)	100 mA	1995
SCR - 1	100 (Vin = 12 VDC)	50 mA	2000
SCR - 2	200 (Vin = 12 VDC)	25 mA	1992
SCR - 3	300 (Vin = 12 VDC)	17 mA	1994
SCR - 4	400 (Vin = 12 VDC)	13 mA	2003
SCR - 5	500 (Vin = 12 VDC)	10 mA	1985
SCR - 10	1,000 (Vin = 12 VDC)	5 mA	1985
SCR - 20	2,000 (Vin = 12 VDC)	2.5 mA	1991
SCR - 30	3,000 (Vin = 12 VDC)	1.7 mA	1983
SCR - 40	4,000 (Vin = 12 VDC)	1.3 mA	1989
SCR - 50	5,000 (Vin = 12 VDC)	1.0 mA	1988

Available Models: (other input voltages available*):

5 Watt Models (Negative output)

Name	Maximum Output Voltage	Maximum Output Current	1st Year
SCR - 0.5N	50 (Vin = 12 VDC)	100 mA	2006
SCR - 1N	100 (Vin = 12 VDC)	50 mA	1993
SCR - 2N	200 (Vin = 12 VDC)	25 mA	1995
SCR - 3N	300 (Vin = 12 VDC)	17 mA	1988
SCR - 4N	400 (Vin = 12 VDC)	13 mA	2003
SCR - 5N	500 (Vin = 12 VDC)	10 mA	1985
SCR - 10N	1,000 (Vin = 12 VDC)	5.0 mA	1987
SCR - 20N	2,000 (Vin = 12 VDC)	7.5 mA	1993
SCR - 30N	3,000 (Vin = 12 VDC)	1.7 mA	1996
SCR - 40N	4,000 (Vin = 12 VDC)	1.3 mA	1995
SCR - 50N	5,000 (Vin = 12 VDC)	1.0 mA	1998

*input voltages of 15, 24, 28 and 48 VDC available



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SCR Series

Electrical Characteristics

(at 25 degrees C unless otherwise specified)

Parameter	Conditions	Value			Units
		Min	Typical	Max	
Supply Voltage*:	(all power models)	10.8VDC	12VDC	13.2 VDC	VDC
Input Current:	No Load:	40	50	75	mA
	Full Load:	550	600	700	mA
Output Ripple:	No Load (all models):	0.7%	0.7%	1%	Vpp
	Full Load (all models):	0.8%	0.8%	1%	Vpp
Load Regulation:	No Load to Full Load			0.1%	VNL/VL
	Half Load to Full Load			0.1%	VNL/VL
Output Linearity	No Load		1%		$\frac{\Delta V_{OUT}}{\Delta V_{OUT (ideal)}}$
Output Linearity	Full Load (all models):		1%		$\frac{\Delta V_{OUT}}{\Delta V_{OUT (ideal)}}$
Short Circuit Current:			200	300	mA
Power Efficiency:	Full Load	60%	70%	75%	$\frac{P_{OUT}}{P_{IN}}$
Reverse Input Polarity	Protected to 20 VDC				
Temperature Drift:	No Load			200	ppm/DegC
	Full Load			200	ppm/Deg C
Thermal Rise:	No Load (case)			15	degrees C
	Full Load (case)			25	degrees C
Slew Rate (10% - 90%)	No Load			100	mS
	Full Load			120	mS
Slew Rate (90% - 10%)	No Load			200	mS
	Full Load			100	mS
Drain Out Time	No Load (5 TC)			150	mS
* Other input voltages available: 15VDC, 24VDC, 28VDC and 48VDC					



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SCR Series

Physical Characteristics

(at 25 degrees C unless otherwise specified)

Parameter	Conditions	Value	Units
Dimensions	MKS	38.1 W x 63.5 L x 19 H	mm
	English	1.5 W x 2.5 L x 0.75 H	inches
Volume:	MKS	46	cm ³
	English	2.8	inch ³
Mass:	MKS	120	grams
	English	4.3	oz
Packaging:	Solid Epoxy Thermosetting		
Finish	Smooth Dial-Phthalate Case		
Terminations:	Gold Plated Brass pins (6)		

Environmental Characteristics



(at 25 degrees C unless otherwise specified)

Parameter	Conditions	Value	Units
Temperature Range	case temperature	-40 degrees to + 71 degrees	Celsius
	case temperature	-40 degrees to + 160 degrees	Fahrenheit
Shock:	MIL-STD-810 Method 516	40 g's	Proc IV
Altitude:	pins sealed against corona	-350 to + 16,700	meters
	pins sealed against corona	-1,000 to +55,000	feet
Vibrations:	MIL-STD-810 Method 514	20 g's	Curve E
Thermal Shock	MIL-STD-810 Method 504	-40 deg C to + 71 deg C	Class 2



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SCR Series Performance Charts

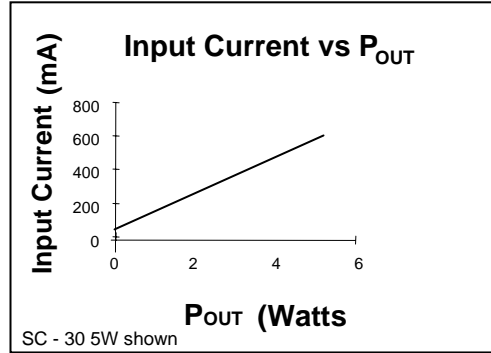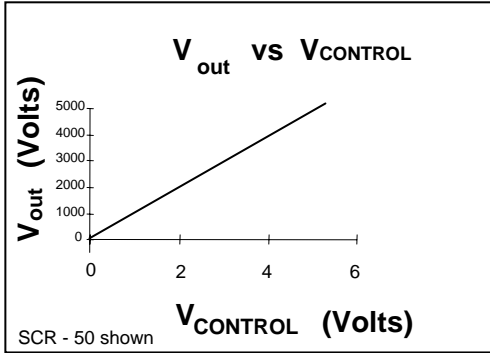

SCR Series Application Notes

The SCR Series high voltage power supplies are powered by an input voltage of 12 VDC. They can be either controlled by an external resistance or an external voltage. Figure 1 below shows the basic hookup using the internal reference as the source of the control voltage. By connecting the Vcontrol pin to the +5.0 volt reference pin the maximum output voltage of the power supply is obtained. This voltage is fixed by the model and is a regulated output. This means, the output voltage will not vary with input line fluctuations or output load changes up to the maximum power rating for the power supply. For standard 12 VDC input models, the input line may vary from 10.8 VDC to 13.2 VDC and the output voltage will remain regulated. Standard output loads may be as high as 5 Watts of power. As shown in Figure 1 below, the simple connection of an SCR unit to a DC source of voltage will provide a high voltage stepped-up output. The input AC bypass capacitor C1 is optional and is utilized to prevent switching spikes from riding back on the input power lines. Values of 0.1 uF to 10 uF are commonly used.

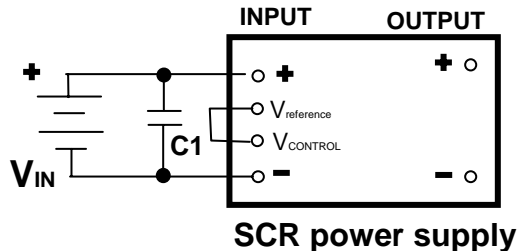


Figure 1: Basic SCR hookup schematic for maximum output
(top view of SCR shown)

The output voltage of the SCR unit may be reduced in value by placing a voltage lower than the +5.0 volt reference voltage onto the Vcontrol pin. By placing a voltage of +2.5 VDC onto the control voltage pin the output will be reduced in half. Figure 2 details a simple method of using an external voltage source to vary the output voltage of the SCR power supply. Typical values of input impedance for the SCR are 10K Ohms. This makes programming via a DAC or operational amplifier an easy chore for the SCR power supply. The control voltage is referenced to the input ground. There exists an internal connection between the input ground and output ground in all SCR power supplies.



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SCR Series Application Notes (continued)

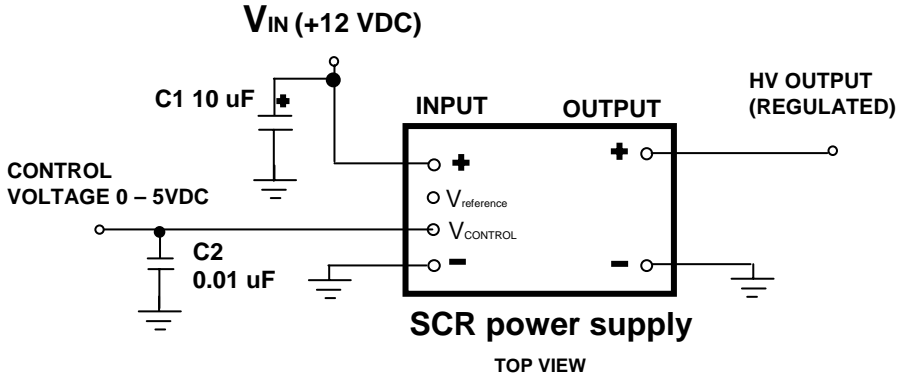


Figure 2: Voltage programming

Capacitor C1 removes switching spikes from the input line and C2 is an AC bypass to insure smooth voltage control levels.

The SCR power supply may also be programmed by using a simple trimpot and the internal +5.0 volt reference. Figure 3 shows this topology. Because the input impedance of the control voltage pin is 10K Ohms, the output of the SCR may be controlled between minimum and maximum values using the formulas given.

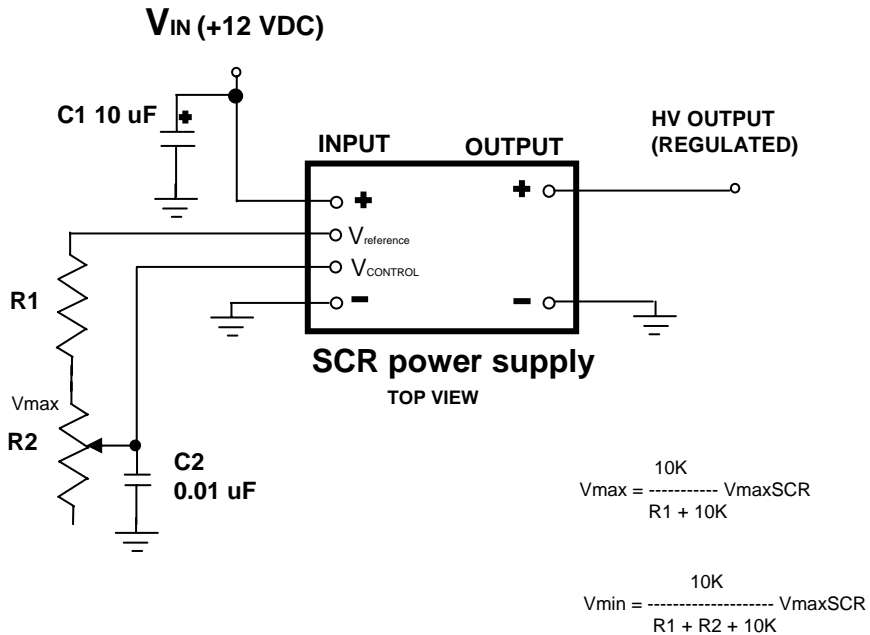



Figure 3: Resistance Programming



AMERICAN HIGH VOLTAGE
POWER SUPPLIES FOR THE WORLD

SCR Series

Equivalent SCR Circuit Model

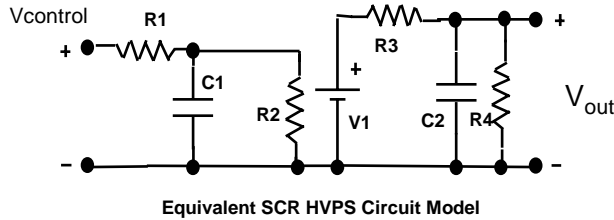


- R1 = 100 Ohms
- R2 = 10K Ohms
- R3 = $(0.01 \times V_{out\ max})$ Ohms
- R4 = $(10 \times V_{out\ max}^2)$ Ohms
- C1 = (47×10^{-6}) Farads
- C2 = $(0.01 \times I_{out\ max} / V_{out\ max})$ Farads
- V1 = $(V_{R2} \times V_{out\ max} / 5.0)$ Volts

For example, for an SCR - 5:

- Vout_{max} = 500 V
- Pout_{max} = 5 W
- Iout_{max} = 0.01 A
- R1 = 100 Ohms
- R2 = 10K Ohms
- R3 = 5 Ohms
- R4 = 2.5 Megohm
- C1 = 47 uF
- C2 = 0.2 uF

Outline Drawing: (inches (millimeters))

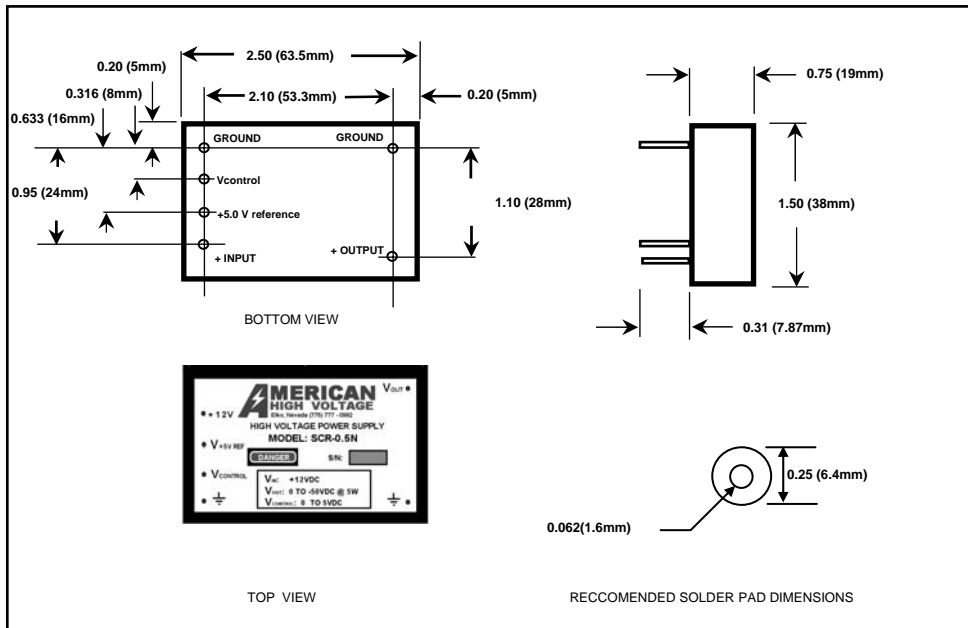

Ordering Information:

SCR - XX Y Watt / Z

XX = Output voltage
Y = Maximum power
Z = Input voltage (blank if 12VDC)

Example:

SC - 30 5W: Maximum output = 3,000 V 5 Watts 12 VDC input
SC - 30 3W/5V: Maximum output = 3,000 V 3Watts 5VDC input